

# SIEMENS



Siemens Comfort  
– uncomplicated and reliable

Intelligent Comfort




In co-operation with Dimplex AS

# Siemens Comfort – 2NC6

## High quality convector heater

- Electronic thermostat
- Easy to install

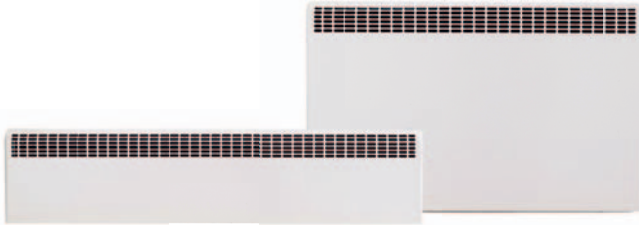

An uncomplicated and reliable convector heater designed for domestic and commercial use. An accurate electronic thermostat with short cycle time maintains a stable room temperature. A red LED is lit when the heating element is energized.

The design of the heater and the air-outlet in front ensures a good distribution of heat in the room and reduces the heat loss through the wall and the window to a minimum.

All heaters are equipped with a double pole On/Off switch and an overheat protection with automatic reset.

The L type of heaters have a supply cord with a plug ready to be connected to a socket outlet. Heaters with F at the end of the type reference, have a junction box for connection to the fixed wiring. The F version has a pilot wire for 5°C set-back controlled by a central time switch.

## Dimplex AS

Bratsbergvegen 5  
7493 Trondheim  
Tel.: +47 73 95 94 00  
Fax: +47 73 95 90 90  
Mail: email@dimplex.no

[www.dimplex.as](http://www.dimplex.as)

In co-operation with Siemens AS

TYPE	POWER W	WIDTH MM
<b>Skirting heater, height 200 mm with cord and plug</b>		
2NC6 042 2L	400	645
2NC6 062 2L	600	915
2NC6 082 2L	800	1095
2NC6 102 2L	1000	1275
2NC6 122 2L	1200	1545
2NC6 152 2L	1500	1725

TYPE	POWER W	WIDTH MM
<b>Panel heater, height 400 mm with cord and plug</b>		
2NC6 042 4L	400	465
2NC6 062 4L	600	555
2NC6 082 4L	800	645
2NC6 102 4L	1000	735
2NC6 122 4L	1200	915
2NC6 152 4L	1500	1095
2NC6 202 4L	2000	1365

TYPE	POWER W	WIDTH MM
<b>Skirting heater, height 200 mm with box</b>		
2NC6 042 2F	400	645
2NC6 062 2F	600	915
2NC6 082 2F	800	1095
2NC6 102 2F	1000	1275
2NC6 122 2F	1200	1545
2NC6 152 2F	1500	1725

TYPE	POWER W	WIDTH MM
<b>Panel heater, height 400 mm with box</b>		
2NC6 042 4F	400	465
2NC6 062 4F	600	555
2NC6 082 4F	800	645
2NC6 102 4F	1000	735
2NC6 122 4F	1200	915
2NC6 152 4F	1500	1095
2NC6 202 4F	2000	1365

Standard heaters are 230 V, kl.I, IP20

Distributor: