
Applications

PPE4.B electronic



Water heaters with electronic control and a temperature adjustment knob.



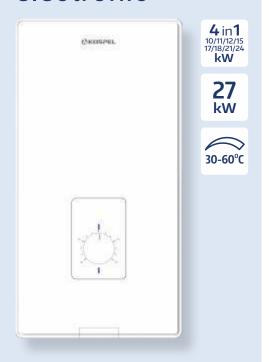



Most important advantages

Electronic control

• precise and comfortable temperature regulation in the range of 30-60°C

4 power levels in one water heater

option to select maximum power (except for 27 kW model)


Possibility of reheating preheated water

• water temperature up to 60°C on the supply

Easy replacement of the old heater with a new one

 specially designed PPE4 housing equipped with a unique hanger allows for easy installation of the heater in the place of the old one.

Dimensions

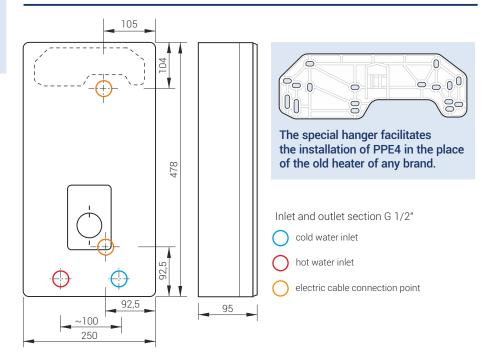

Technical data

Туре	Rated power / Rated voltage	Supply water pressure (MPa)	Rated current (A)	Min. connecting wires section (mm²)	Efficiency (Δt=30°) (l/min.)
PPE4.B-10/11/12/15	10/11/12/15 kW / 400V 3~	0,1 - 1,0	3x14,5/15,9/17,3/21,7	4 x 2,5	4,3/5,2/5,8/7,2
PPE4.B-17/18/21/24	17/18/21/24 kW / 400V 3~	0,1 - 1,0	3x24,7/26,0/30,3/34,6	4 x 6	8,1/8,7/10,1/11,6
PPE4.B-27	27 kW / 400V 3~	0,1 - 1,0	3x39	4 x 6	13,0

